

NOVADOS H1


Metering Pumps

Versatility




These units can be combined to multiplex pumps for process or recipe metering with all gear sizes of Bran+Luebbe's horizontal NOVADOS range H1, H2, H3, H4, H5, H6, B and BS

Flow rates up to 748 l/h

Pressure up to 500 bar

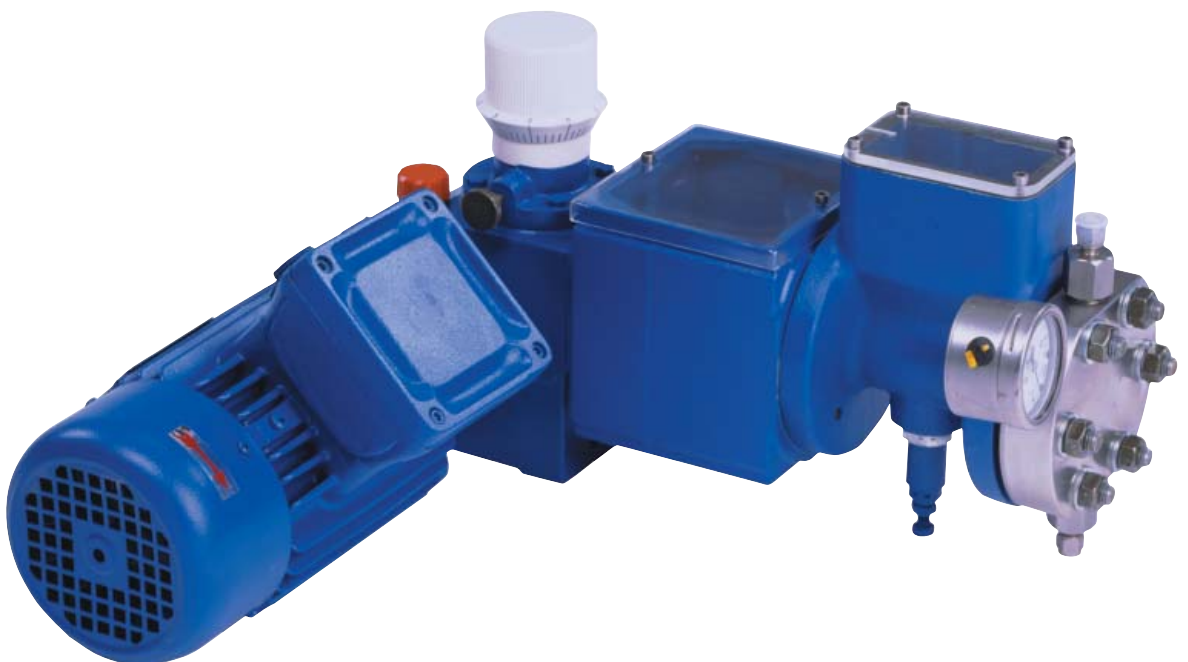

General specification

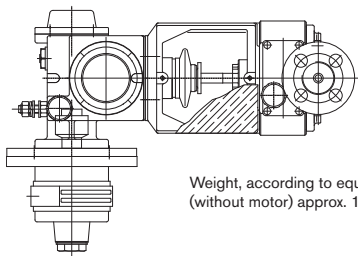

Weight, according to equipment (without motor) approx. 19-106 kg

Materials of construction of liquid-wetted parts

- Housings of St. Steel 1.4571, 1.4581 or 1.4462, alternatively, PVC or PP
- Diaphragms of PTFE or stainless steel 1.4310
- Plungers of stainless steel or ceramic
- Options: materials such as Super Duplex, Hastelloy, Titanium, Halar® coating or PVDF and other materials

Pump gear design

- Worm gear with different reduction ratios
- Splash lubrication without oil pump
- Large oil sump
- Suitable for variable speed

Stroke length adjustment

- Eccentric (Z-shape) crankshaft

Flow rate control

- Manually, electrically, or pneumatically during operation and standstill, or speed variation

Driver

- 2- or 4-pole electric motor with fixed or variable speed
- Air or gas motor (upon request)

Installation and Operating Conditions*

- **Hazardous area:** up to Zone 1 IIC T4 (Zone 22 upon request)
- **Ambient temperature range:** from -40°C up to +55°C (special solutions upon request)
- **Fluid temperature range:** from -40°C up to +150°C (special solutions upon request)

* These are limit values, please state actual conditions with inquiry.

Flow rate table (for single module)¹⁾

Pump head type		Diaphragm		Plunger	
Material of displacement body		PTFE	St. Steel	Ceramic or St. Steel	
Housing material		St.Steel/Plastic	St. Steel	St. Steel or Plastic	
Flow rate at 200 min ⁻¹		max. operating pressure ²⁾			
	l/h	bar	bar	bar	
0..	1,7	-	-	500	
0..	4,7	125	-	500	
0..	6,7	-	500	-	
0..	12,1	350	298	298	
0..	18,8	200	-	-	
0..	27,1	125	133	133	
0..	48,2	80	-	-	
0..	75,4	50	48	48	
0..	118	32	-	-	
0..	170	-	21	21	
0..	193	20	-	-	
0..	301	12,5	-	-	
0..	332	-	11	11	
0..	471	8	-	8	
0..	591	6	-	6	
0..	725	-	-	5	
0..	748	5	-	-	

1) The table shows an excerpt of all possibilities and serves as an initial guideline. Pumps will be sized for the specific requirements.

2) Max. operating pressure of actual pumps may deviate from figures stated. Pumps with housing material plastic are generally limited to max. 10 bar operating pressure

- Flow rates at 100% volumetric efficiency. Please allow for transmission losses. The figures stated serve as guideline only.
- Metering accuracy: as good as ±0.5%
- Selectable stroking speeds (50 Hz): 50, 63, 72, 85, 100, 127, 144, 170, 200 min⁻¹. Different stroking speeds for 60 Hz driver.

We reserve the right for technical changes without notice.

SPX Flow Technology - Werkstrasse 4 - D-22803 Norderstedt
Phone: +49 40 52202-0 - Fax: +49 40 52202-444
E-mail: bl@spx.com - http://www.branluebbe.com

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit www.branluebbe.com / www.spxft.com

SPX Corporation reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

Issued: BL-104 - 0.5 - E 04/2010

Copyright © SPX Corporation 2010

SPX®