
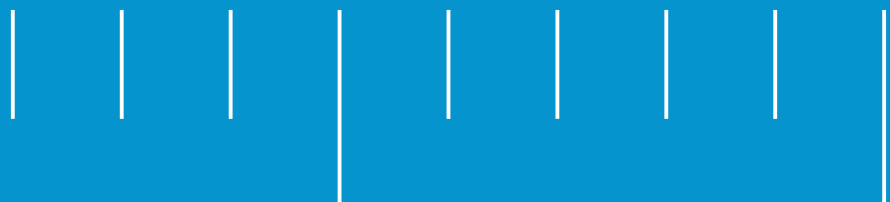


Actuators

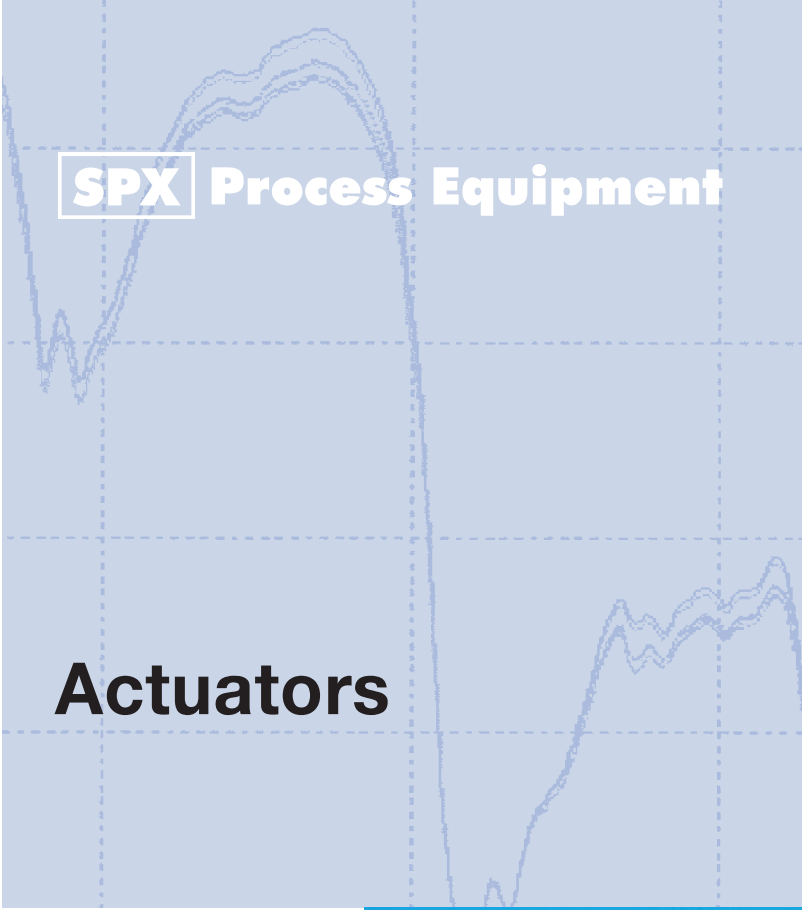

Actuators

Controls and eventhandling are performed by actuators. One remarkable feature is the variety of possible outputs. The different outputs allow an ideal connection of the actuators to peripheral devices.

Ambient temperature limit

Storage: 0°C bis +50°C
Operation: + 5°C bis +50°C

Power supply

24 V_{DC}, 2 W

Dimensions (widthxheightxdepth)

80x125x60 mm

Weight

approx. 600 g

Protection class

IP 66

Interface

CAN-Bus

Item-Number

Output

48 806 A00 00 A

Switch TTL-level

48 806 A00 00 B

eightfold digital I / O Port,
galvanically isolated

48 806 A00 00 C

0 to 10 V

48 806 A00 00 D

0 / 4 to 20 mA

48 806 A00 00 E

PWM Open Collector

48 806 A00 00 F

Relay, 230 V, 4 A, galvanically
isolated